



# Hexagonal Bore Series With Cylindrical Outer Ring

## 204KRR2

Hexagonal Bore Series With Cylindrical Outer Ring  
Seeding Machine

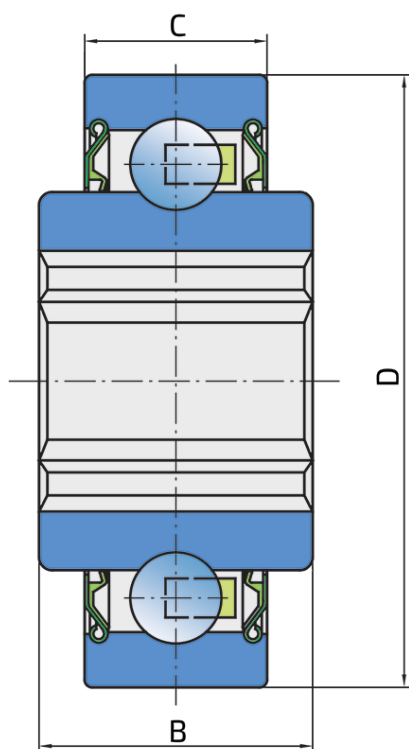

### Technical Specification

a	Hexagonal bore	17.65 mm
D	Outside diameter	47 mm
B	Width inner ring	20.96 mm
C	D-shape hole cut out dimension	14 mm
d	Bore diameter	18.2 mm
kg	Mass	0.15 kg
C <sub>dyn</sub>	Dynamic load rating	12.9 kN
C <sub>o</sub>	Static load rating	6.6 kN
P <sub>u</sub>	Fatigue load limit	0.277 kN

## Sealing

---

### S SEAL / S SEAL (2S)

Single lip seal with the labyrinth between the sheet part and the rubber lip which conducts the contact sealing. The friction and speeds are the same as with RS but provides much better protection against the rough impurity particles. This is very good sealing system: the sheet part protects the seal from the soil, dust and rough particles. At the same time makes the labyrinth with the rubber part. The rubber part provides contact sealing which prevents penetration of finer impurities, water, moisture, steam etc. Suitable for neutral conditions because of the presence of the foreign materials. It is used with the Y bearing (standard) and deep groove ball bearings.

